


DATA SHEET TUBE BICOLOR PCB LOW PROFILE (TBL)

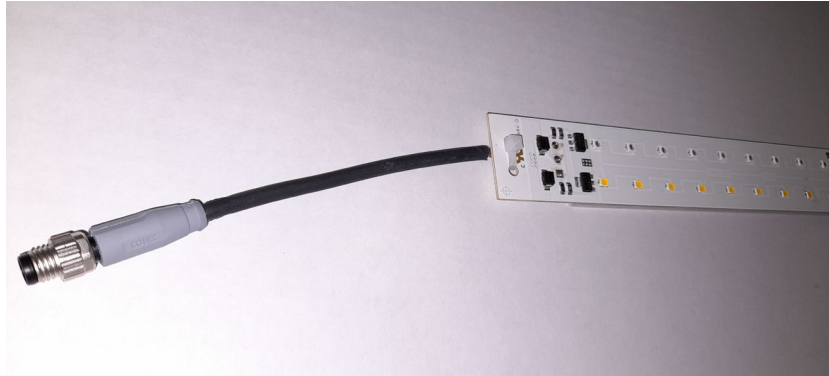

Middle power high brightness led illuminator

- Available in 5 lengths.
- 10 cm or 50 cm bipolar cable with tripolar M8 male connector or up to 3 m long free wires.
- Double led series for bicolor light with a single illuminator. It is possible to turn on only one color at a time.
- White color temperature available: 3500K, 4000K, 5700K.
- Led color available: red, amber yellow, green, blue.
- Built-in driver available with current: 350mA, 500mA, 750mA, 1050mA, 1400mA, 1580mA.
- PCB available in coated version.
- Ambient temperature 25°C.
- Compliance to EN 62471:2008-09 gruppo 0.
- CE conformity.

Model	Dimensions (mm)	Led numbers for single color	Max power (W) for single color
TBL035xxxxxxxxxx	350 x 29 x 13 max	18	11
TBL049xxxxxxxxxx	490 x 29 x 13 max	27	16
TBL063xxxxxxxxxx	630 x 29 x 13 max	36	22
TBL077xxxxxxxxxx	770 x 29 x 13 max	45	27
TBL091xxxxxxxxxx	910 x 29 x 13 max	54	33

For light emission value (Lux) please refer to product complete datasheet

For further information ask for the product complete datasheet

STARDUST ☆

is a product line propriety of BOSTON ELETTRONICA S.R.L.