


DATA SHEET TUBE PCB LOWPROFILE (TML)

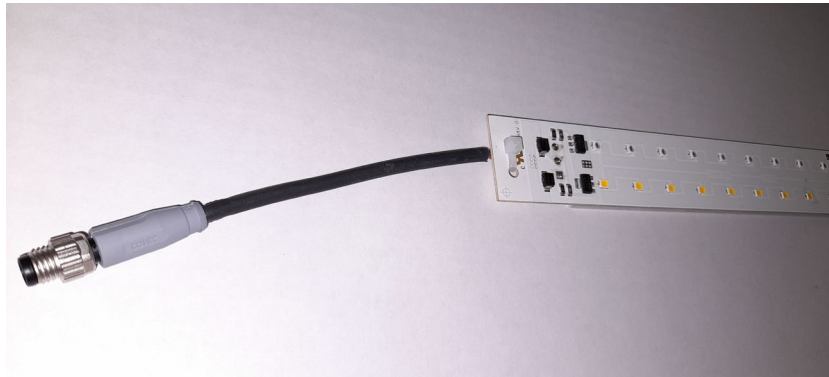

Middle power high brightness led illuminator

- Available in 6 lengths.
- 10 cm or 50 cm bipolar cable with tripolar M8 male connector or up to 3 m long free wires.
- White color temperature available: 3500K, 4000K, 5700K.
- Led color available: red, amber yellow, green, blue.
- Built-in driver, fixed or adjustable with 0:10V bus, available with current: 350mA, 500mA, 750mA, 1050mA, 1400mA, 1580mA, 2000mA, 2150mA.
- PCB available in coated version.
- Ambient temperature 25°C.
- Compliance to EN 62471:2008-09 gruppo 0.
- CE conformity.

Model	Dimensions (mm)	Led number	Max power (W)	Lux with 1580mA driver at:		
				100cm	150cm	200cm
TMP035xxxxxxxxxxx	350 x 29 x 13 max	36	15	430	200	120
TMP049xxxxxxxxxxx	490 x 29 x 13 max	54	22	640	310	190
TMP063xxxxxxxxxxx	630 x 29 x 13 max	72	29	860	420	260
TMP077xxxxxxxxxxx	770 x 29 x 13 max	90	37	1070	530	320
TMP091xxxxxxxxxxx	910 x 29 x 13 max	108	44	1270	620	380
TMP105xxxxxxxxxxx	1050 x 29 x 13 max	126	51	1500	740	450

For further information ask for the product complete datasheet

STARDUST ☆

is a product line propriety of BOSTON ELETTRONICA S.R.L.