

DATA SHEET LINEAR LN08B LED LAMPS SERIES




Middle power led lamps for free-standing installation

- FR4 PCB thickness 1,6mm.
- Equipped with 11 4000K or 5700K white led + 2 red led for general purpose signal.
- Output available: free wires for direct welding, 10cm or 50cm bipolar cable with male M8 connector.
- Costant current power supply up to 2000mA Max - 24 Vdc with Boston DVBK series driver.
- In/Out power supply for chain connection.
- Ambient temperature 25°C
- Average life 50.000 hours
- Compliance to EN 62471:2008-09 group 1
- CE conformity

Model	Lux at 0,5 meter	Lux at 1 meter	Lux at 1,5 meters
Series LN08B1	1000	245	110
Series LN08B2	1745	470	220
Series LN08B3	2460	680	330
Series LN08B4	2850	890	435
Series LN08B5	3280	1075	550
Series LN08B6	3500	1240	640
Series LN08B7	3660	1410	735

Measured with 4000K white LED, external DVBK 1400mA driver and transparent flat screen

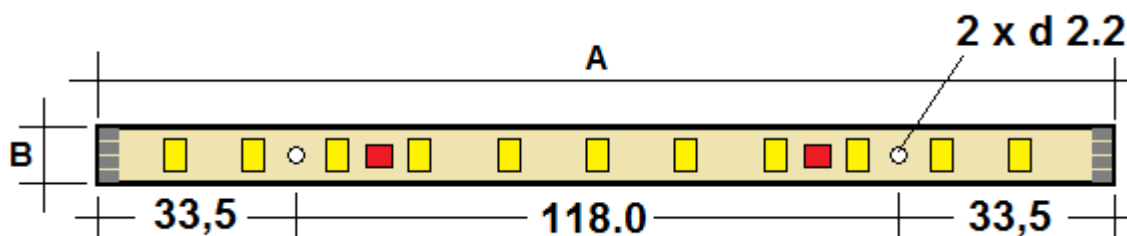

For further information ask for the product complete datasheet

STARDUST★

is a product line propriety of BOSTON ELETTRONICA S.R.L.