



DATA SHEET LINEAR LN09 LED LAMPS SERIES




Middle power led lamps for free-standing installation

- FR4 PCB thickness 1,6mm available in standard or coated version
- Equipped with 20 led, colors available: 3500K white, 4000K white, 5700K white, red, amber, green and blue
- Output available: free wires for direct welding, 50cm bipolar cable, 4 poles fast plug connector, 4 poles extractable terminal block
- Costant current power supply with on board 570mA driver
- In/Out power supply for chain connection
- Ambient temperature 25°C
- Average life 50.000 hours
- Compliance to IEC/TR 62778:2014, photobiological safety
- CE conformity

| Model | Lux at 0,5m | Lux at 0,75m | Lux at 1m | Lux at 1,25m | Lux at 1,50m |
|--|-------------|--------------|-----------|--------------|--------------|
| LN09570Nxxxx | 1830 | 790 | 450 | 300 | 210 |
| <i>Measured with 4000K white LED and built-in 570mA driver</i> | | | | | |

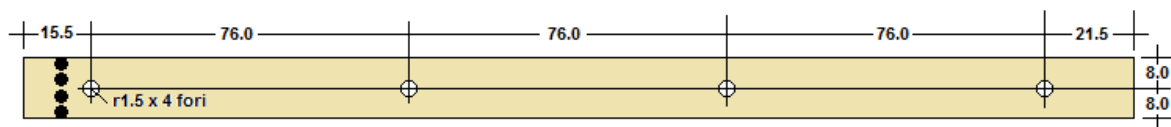

Free wires, cable or terminal block versions

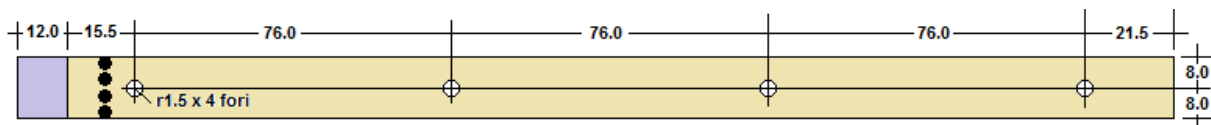

Connector version

For further information ask for the product complete datasheet

STARDUST ☆

is a product line propriety of BOSTON ELETTRONICA S.R.L.