



DATA SHEET LINEAR LN11C LED LAMPS SERIES

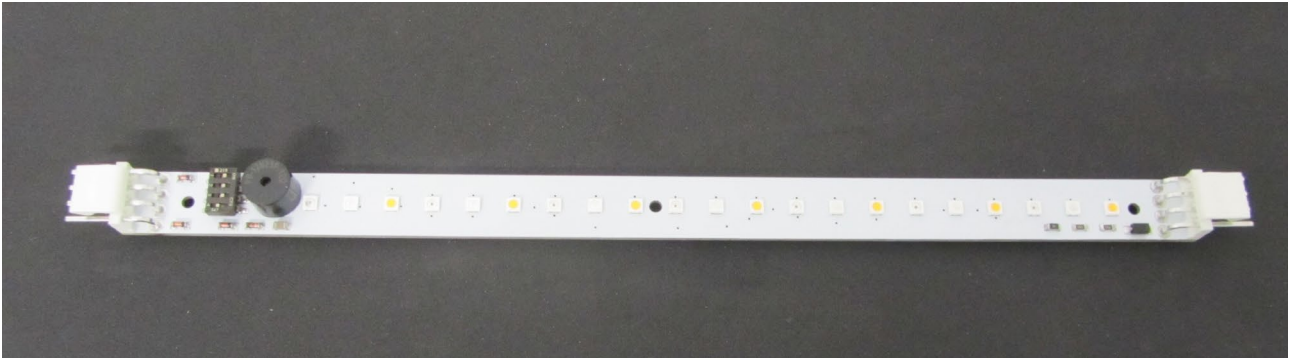

Middle power beacon led lamps for free-standing installation

- FR4 PCB thickness 1,6mm available in standard or coated version
- Three independent leds series (7+7+7) and one buzzer
- Dip Switch for buzzer pairing with one or more led series
- Buzzer sound emission 85dB
- Available colors for every led group: red, amber, green, blue.
- In/Out output available: direct welding, 4 poles fast plug connector, 4 poles extractable terminal block
- 24 Vdc constant voltage power supply
- Ambient temperature 25°C
- Avarage life 50.000 hours
- Compliance to IEC/TR 62778:2014 group 1, photobiological safety
- CE conformity

Led color	Lux at 0,5m	Lux at 1m	Lux at 1,5m
Red 630nm	37	11	6
Green 520nm	98	27	16
Amber 610nm	98	27	16

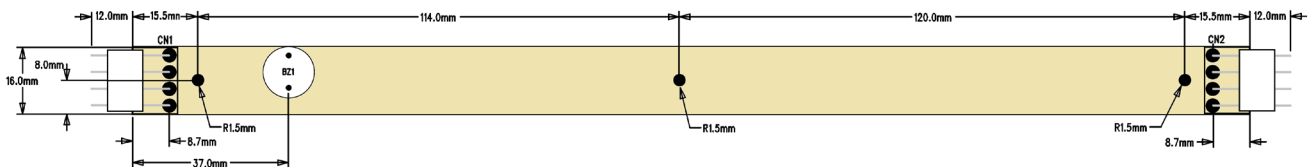

For further information ask for the product complete datasheet



is a product line propriety of BOSTON ELETTRONICA S.R.L.