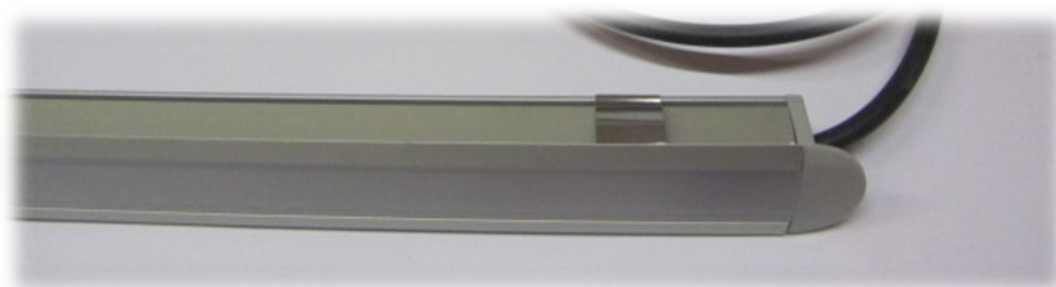


**DATA SHEET LINEAR LN15 LED LAMPS SERIES****Middle power LED lamp for recess installation**

- Structure made of extruded aluminum with neutral anodisation.
- Endings made of grey tecnopolymer.
- Available colors 3500K white, 4000K white, 5700K white, red, amber yellow, green, blue.
- 80 Typical CRI chromatic coefficient.
- Costant current power supply 2200mA Max - 24 Vdc with Boston DVBK series driver.
- Room temperature 25°C.
- Average lifetime 40.000 hours.
- Connection with tripolar insulated cable 10 cm or 50 cm long with M8 male connector or bipolar insulated cable 10 cm or 50 cm long with free endings.
- Compliance with EN 62471:2008-09 group 0.
- CE Marking.

Model	Dimensions (mm)	Maximum Power (W)	Lux at		
			100cm	150cm	200cm
LN1501	269 x 25 x 16.5	7	350	160	100
LN1502	494 x 25 x 16.5	13	690	330	210
LN1503	719 x 25 x 16.5	20	970	460	280
LN1504	944 x 25 x 16.5	27	1240	600	370
LN1505	594 x 25 x 16.5	20	970	460	280

**For further information please ask us the complete product Data-Sheet**

**STARDUST** *☆*

IS A PRODUCT LINE UNDER THE OWNERSHIP OF BOSTON ELETTRONICA S.R.L.