


DATA SHEET LINEAR LN1550 LED LAMPS SERIES

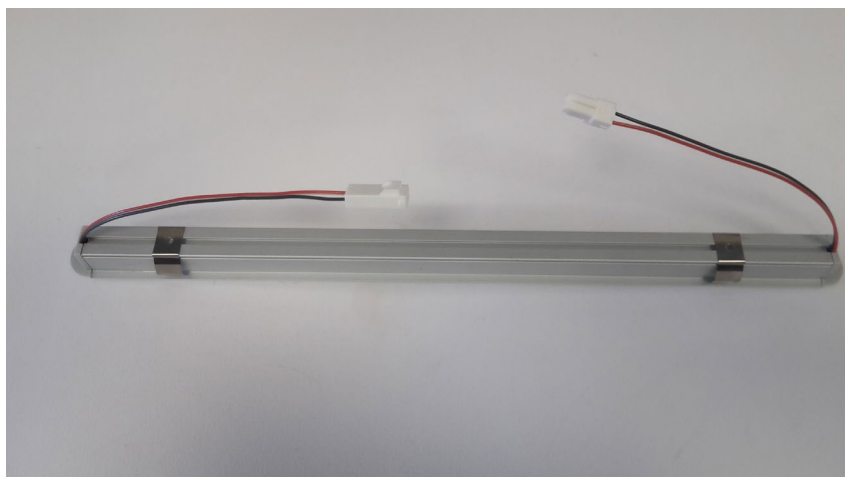

Middle power led lamps for recessed installation

- Extruded neutral anodized aluminium structure
- End cover in grey technopolymer
- Available colors 3500K white, 4000K white, 5700K white
- Typical CRI coefficient: 80
- 24 Vdc constant voltage power supply with 400mA power consumption
- Ambient temperature 25°C
- Average life 40.000 hours
- Two different types of diffuser
- In/Out connection made by red/black bipolar cables 70 cm length with male/female fast plug connectors
- Compliance to IEC/TR 62778:2014 group 0, photobiological safety
- CE conformity

Model	Dimensions (mm)	Max power consumption (mA)	Lux at		
			100cm	150cm	200cm
LN1550	409 x 25 x 16.5	400	500	240	150

For further information ask for the product complete datasheet

STARDUST [☆]

is a product line propriety of BOSTON ELETTRONICA S.R.L.