


**DATA SHEET LINEAR LN30 LED LAMPS SERIES**

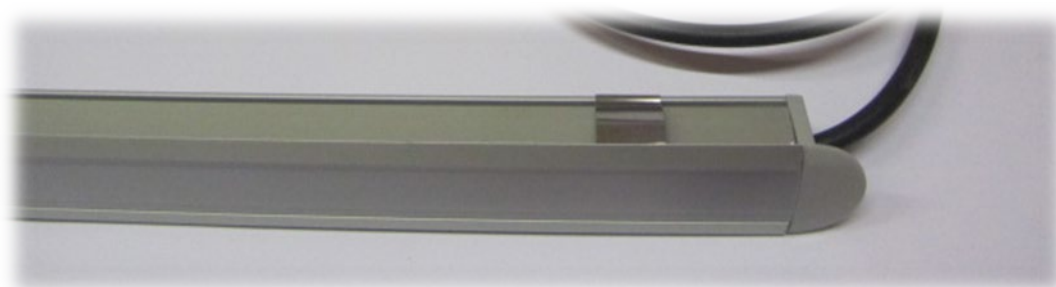

**Middle power led lamps for recessed installation**

- Extruded neutral anodized aluminium structure
- End cover in grey technopolymer
- Available colors 3500K white, 4000K white, 5700K white, red, amber yellow, green, blue
- Typical CRI coefficient: 80
- 24 Vdc constant voltage power supply, power consumption from 400mA to 2A according to lamp lenght
- Ambient temperature 25°C
- Avarage life 40.000 hours
- Two different types of diffuser
- Output available: 10 cm or 50 cm bipolar cable with tripolar M8 male connector or free wires, red/black bipolar flat cable with fast plug SLP-02V connector
- Compliance to IEC/TR 62778:2014 group 0, photobiological safety
- CE conformity

Model	Dimensions (mm)	Max power consumption (mA)	Lux at		
			100cm	150cm	200cm
LN3001	425 x 25 x 16.5	400	350	160	100
LN3002	785 x 25 x 16.5	800	690	330	210
LN3003	1155 x 25 x 16.5	1200	970	460	280
LN3004	1515 x 25 x 16.5	1600	1240	600	370
LN3005	1885 x 25 x 16.5	2000	1500	730	440
LN3006	375 x 25 x 16.5	400	-	-	-
LN3007	685 x 25 x 16.5	800	-	-	-
LN3008	1005 x 25 x 16.5	1200	-	-	-
LN3009	1315 x 25 x 16.5	1600	-	-	-
LN3010	1635 x 25 x 16.5	2000	-	-	-

**For further information ask for the product complete datasheet**

**STARDUST** <sup>☆</sup>

is a product line propriety of BOSTON ELETTRONICA S.R.L.