


**DATA SHEET ROUND 10060 LED LAMP SERIES**

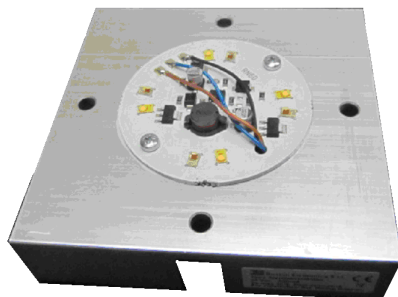

**Double light power LED lamps for application on existing structure**

- Metal-Core PCB 1,6mm thick, 60mm diameter.
- Integrated heatsink with fixing holes.
- 4 + 4 on board power led series, separately controllable (it's not possible light up at the same time the two different led series).
- Colour temperatures available for white led 3500K, 4000K, 5700K.
- Led colours available Red, Amber Yellow, Green, Blue.
- +24 Vdc constant current power supply with on board 350, 500 or 700mA driver.
- Room temperature 25°C.
- Average lifetime 50.000 hours.
- Tripolar insulated cable 10 cm or 50 cm long for connection with tripolar male M8 connector or tripolar insulated cable 50 cm long with free endings.
- Compliance with EN 62471:2008-09 group 1
- CE Marking

Model	Dimensions (mm)	Lux at				
		50cm	100cm	150cm	200cm	250cm
<b>LN100605NRxxxxx<sup>1</sup></b>	100 x 100 x 32	1050	270	130	75	50
<b>LN100605NRxxxxx<sup>2</sup></b>	100 x 100 x 32	400	100	50	30	20

<sup>1</sup> WHITE LED 4000K <sup>2</sup> RED LED 627nm with 500mA driver

- Led typical wavelengths for different colours

Blue	475 nm	Green	530 nm
Amber yellow	590 nm	Red	625 nm

**For further information please ask us the complete product Data-Sheet**

**STARDUST** *l'arte di illuminare*

IS A PRODUCT LINE UNDER THE OWNERSHIP OF BOSTON ELETTRONICA S.R.L.