


DATA SHEET ROUND 10060 LED LAMP SERIES

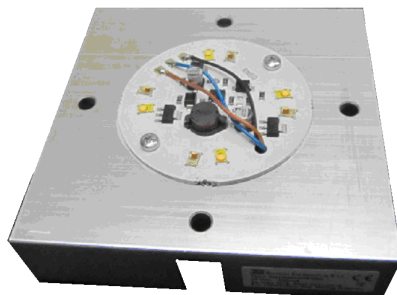

Double light power LED lamps for application on existing structure

- Metal-Core PCB 1,6mm thick with 60mm diameter
- Integrated heatsink with ready fixing holes
- 4 + 4 on board double power led series, separately controllable (it's not possible light up at the same time the two different led series)
- Colour temperatures available for white led 3500K, 4000K, 5700K
- Led colours available Royal Blue – Blue – Green – Amber Yellow – Orange - Red
- +24 Vdc constant current power supply with on board 350, 500 or 700mA driver
- Room temperature 25°C
- Average lifetime 50.000 hours
- Tripolar insulated cable 10 cm or 15 cm long for connection with tripolar male M8 connector or tripolar insulated cable 500 cm long with free endings
- Compliance with EN 62471:2008-09 group 1
- CE Marking

Model	Dimensions (mm)	Lux at				
		50cm	100cm	150cm	200cm	250cm
LN100605NRxxxxx¹	100 x 100 x 32	1050	270	130	75	50
LN100605NRxxxxx²	100 x 100 x 32	400	100	50	30	20

¹ WHITE LED 4000K ² RED LED 627nm with 500mA driver

- Led typical wavelengths for different colours

Royal blue	460 nm	Blue	475 nm
Green	530 nm	Amber yellow	590 nm
Orange	615 nm	Red	625 nm

For further information please ask us the complete product Data-Sheet

STARDUST ☆

IS A PRODUCT LINE UNDER THE OWNERSHIP OF BOSTON ELETTRONICA S.R.L.
VIALE ORTLES, 80 - 20139 MILANO ☎ 02/55211283