


**DATA SHEET TUBE LED LAMPS SERIES**

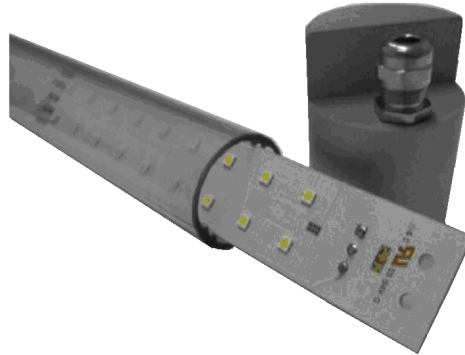

**Middle power high brightness led lamps, IP65 rated, semi-recess installation**

- Structure made by single chamber extruded polycarbonate available in 6 different lengths with transparent, opaline or transparent with glazed diffuser finishing.
- Terminals made by neutral anodized aluminium with double O-Ring for sealing and directable fixing hole.
- IP 65 Rated.
- Power supply cable connection made with nichel-plated brass.
- On board tripolar terminal block for +24 Vdc power supply and 0:10V regulation bus connection or tripolar cable 10 cm or 50 cm long with M8 male connector.
- Colour temperatures available for white led 3500K, 4000K, 5700K.
- Led colours available, Red, Amber Yellow, Green, Blue.
- On-board driver available with 350mA, 500mA, 750mA, 1050mA, 1400mA, 1580mA, 2000mA, 2150mA currents.
- Dimmer function available with 0:10Vdc bus.
- Room temperature 25° C.
- Compliance with EN 62471:2008-09 group 0.
- CE Marking.

Model	Dimensions (mm)	Led numbers	Max power (W)	Lux with 1580mA driver at:		
				100cm	150cm	200cm
<b>TM040xxxxxxxxxx</b>	410 x Ø 46 max	36	15	430	200	120
<b>TM050xxxxxxxxxx</b>	550 x Ø 46 max	54	22	640	310	190
<b>TM065xxxxxxxxxx</b>	690 x Ø 46 max	72	29	860	420	260
<b>TM080xxxxxxxxxx</b>	830 x Ø 46 max	90	37	1070	530	320
<b>TM095xxxxxxxxxx</b>	970 x Ø 46 max	108	45	1270	620	380
<b>TM110xxxxxxxxxx</b>	1110 x Ø 46 max	126	51	1500	740	450

**For further information please ask us the complete product Data-Sheet**

**STARDUST** ☆

IS A PRODUCT LINE UNDER THE OWNERSHIP OF BOSTON ELETTRONICA S.R.L.