

DATA SHEET LINEAR LN04 LED LAMPS SERIES




Power LED lamp for surface supporting installation

- PCB made with Metal-Core 1,6mm thick
- 3, 4 or 5 power LEDs series on board
- White LEDs colour temperatures available 3500K, 4000K, 5700K
- Custom realisation with coloured LEDs available on request
- Costant current power supply with 350mA, 500mA, 700mA on board driver
- Room temperature 25°C
- Average lifetime 50.000 hours
- Compliance with EN 62471:2008-09 group 1
- CE Marking

| Distance (cm) | Lux (3 LED version) | Lux (4 LED version) | Lux (5 LED version) |
|---------------|---------------------|---------------------|---------------------|
| 50 | 920 | 1225 | 1570 |
| 100 | 260 | 345 | 430 |
| 150 | 125 | 170 | 210 |
| 200 | 75 | 95 | 120 |
| 250 | 50 | 60 | 80 |

Measurements made with 4000K white LEDs and on board 700mA driver

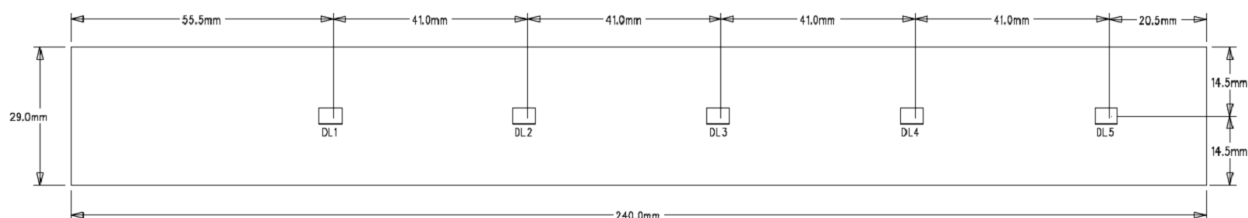

5 led version = DL1 + DL2 + DL3 + DL4 + DL5
 4 led version = DL1 + DL2 + DL3 + DL4
 3 led version = DL1 + DL3 + DL5

For further information please ask us the complete product Data-Sheet

STARDUST [☆]

IS A PRODUCT LINE UNDER THE OWNERSHIP OF BOSTON ELETTRONICA S.R.L.
 VIALE ORTLES, 80 - 20139 MILANO ☎ 02/55211283